

7/8" Flexible Annular Corrugated Coax Cable


HCTAY(Z)-50-22(7/8")

► Overview

50 ohm RF cable with foam degree of about 80% of the ultra-high foam polyethylene, low attenuation, the temperature coefficient is small, the temperature changes have a good stability. It is mainly used as a low loss, low VSWR signal transmission line in wireless base stations such as mobile communication, antenna feeder, microwave transmission, broadcasting communication and other systems base stations, and the connection between receiver and antenna or other high frequency fields.



► Construction

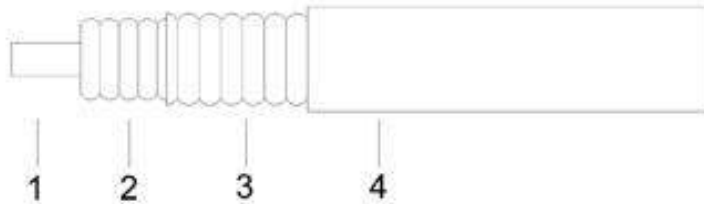

Item	Material	Diameter (mm)
1.Inner conductor	Smooth Copper Tube	9.00±0.02
2.Dielectric	Physical Foam Polyethylene	22.10±0.2
3.Outer conductor	Annular Corrugated Copper Tube	25.00±0.2
4.Jacket	Black PE	28.00±0.2

► Electrical Characteristics

1.Capacitance (pF/m)	76
2.Impedance (Ω)	50
3.Velocity (%)	88
4.Peak Power Rating (kW)	91.0
5.RF Peak Voltage (kV)	3.0
6.Insulation Resistance (MΩ.km)	>5000
7.Cut-off Frequency (GHz)	5.2
8.Insulation Voltage (kVrms)	10
9.Jacket Spark (kVrms)	8.00
10.Shielding Effectiveness (dB)	>120

► **Mechanical and Environmental Characteristics**

Min. Single Bending Radius (mm)	90
Min. Repeated Bending Radius (mm)	250
No. of Bends	15
Mobile Apply (mm)	500
Bending Moment (N.m)	16.3
Tensile Strength (kg)	147
Storage Temp (°C)	-55 to +85
Installation Temp (°C)	-40 to +60
Operating Temp (°C)	-55 to +85
VSWR≤(Return loss≥dB)	
0.005-3GHz	1.15 (23)
0.8-1.0GHz	1.10 (26)
1.7-2.0GHz	1.10 (26)
2.0-2.4GHz	1.10 (26)

► **Attenuation (VSWR1.0, cable temp. 20°C) & Average Power (VSWR 1.0, ambient temp. 40°C)**

Frequency (MHz)	Attenuation (dB/100m)	Average Power (kW)
100	1.17	8.69
200	1.69	6.06
450	2.60	3.92
800	3.56	2.86
900	3.80	2.68
1000	4.03	2.53
1500	5.08	2.01
1800	5.61	1.81
2000	6.05	1.70
2200	6.40	1.61
2400	6.75	1.52
2500	6.90	1.48
3000	7.60	1.34
4000	9.16	1.11
5000	10.50	0.97